



WALCOOM

Walcoom Corporation



SCAFFOLD DEBRIS NETTING

www.walcoom.com
E-mail: sales@walcoom.com

Scaffold Debris Netting Providing the Buffer of Falling People or Articles



Scaffold debris netting, also called construction safety net, is known for its good fall protection performance. It can be divided into 2 types: horizontal debris netting and vertical debris netting.


Scaffold debris netting has high strength and flexibility and can bear heavy people and articles from high altitude to prevent injury and damage. It also can make the working environment clean. It is widely applied to building construction and installation, bridge construction, power station, water construction, parking lot and other working sites.

Features:

- High strength and flexibility – providing the buffer of falling people or articles.
- Flame retardant and UV stabilized – not easily be fired or destroyed.
- Good air permeability – has ruled arranged openings.
- Firm, tough, durable and economic – a long service life.
- Easy installation – has eyelet holes on the edge.

Categories and specifications:

- **Specification of horizontal debris netting:**
 - **Material:** nylon and high density polyethylene.
 - **Types:** knotted debris netting and unknotted debris netting.

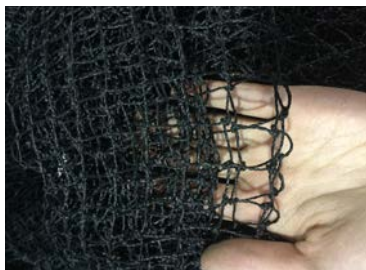

Knotted horizontal debris netting.



Unknotted horizontal debris netting.


- **Length:** 6–100 m.
- **Width:** 1.8–4 m.
- **Density:** 70–280 g/m².

SCAFFOLD DEBRIS NETTING

- **Shade Rate:** 30% – 90%.
- **Color:** green, black, orange, blue, red, etc.
- **Applied pattern:** One layer and two layers.




Horizontal debris netting one layer.

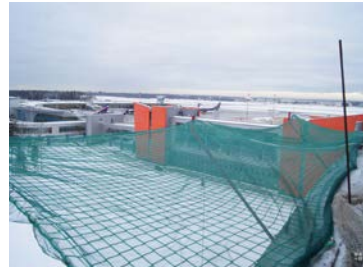


Horizontal debris netting two layers.

● Specifications of vertical debris netting:

- **Material:** polyethylene or high density polyethylene.
- **Length:** 50 m – 200 m or as required.
- **Width:** 1 m – 10 m or as required.
- **Popular size:** 3 m × 50 m, 4 m × 50 m, 3 m × 100 m and 4 m × 100 m.
- **Density:** 50–300 g/m².
- **Shade rate:** 30% – 90%.
- **Color:** blue, green, orange, black, white, etc.

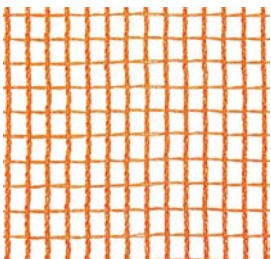


Vertical debris netting woven type 1.

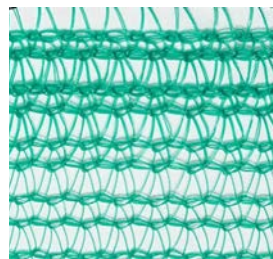


Vertical debris netting woven type 2.




Vertical debris netting woven type 3.

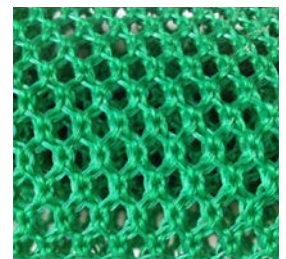


Vertical debris netting woven type 4.

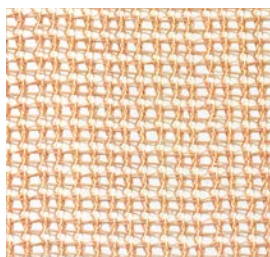

Orange construction netting.

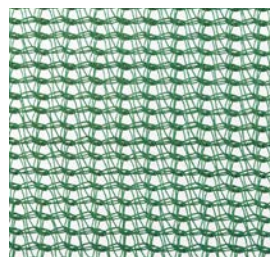


Green construction netting.

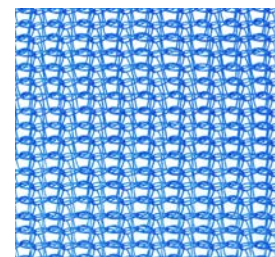

Blue construction netting.


SCAFFOLD DEBRIS NETTING

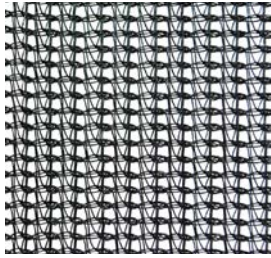

Black construction netting.



Gray construction netting.

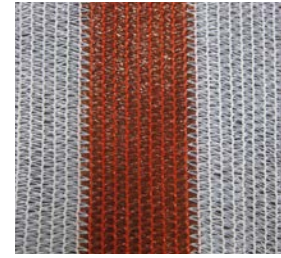

Orange & white construction netting.

Applications:

- Fall protection netting in building construction and installation.
- Construction netting in bridge construction and high way construction.
- Construction safety net in parking lot.
- Safety netting for isolation in power station and water construction.
- Work high above ground in various working sites.
- Wind and dust control.
- Visual barrier.



Horizontal debris netting parking lot.



Horizontal debris net construction.



Vertical debris net road isolation.



Vertical debris net construction.

Packing:

- 5 pcs, 10 pcs or 20 pcs per bundle or roll.
- In plastic films.



Debris netting eyelet holes edge.



Debris netting roll package.



Debris netting bundle package.

SCAFFOLD DEBRIS NETTING

Walcoom Corporation



Add: No. 3481, Yongxing Road, Hengshui City, Hebei Province, China.

Tel: +86-15030811699

Skype: wiremesh@live.com

E-mail: sales@walcoom.com

Web: <http://www.walcoom.com>

